


WIRE SIZE	BREAKER SIZE	CONDUIT SIZE
#6 CU	60 Amp	1 inch
#4 CU	100 Amp	1 1/4 inch
#2 CU	125 Amp	1 1/4 inch
#1/0 CU	150 Amp	2 inch
#2/0 CU	200 Amp	2 inch
Call office	Over 200 Amp	Call office

Members May use One Size Down For Neutral Wire.

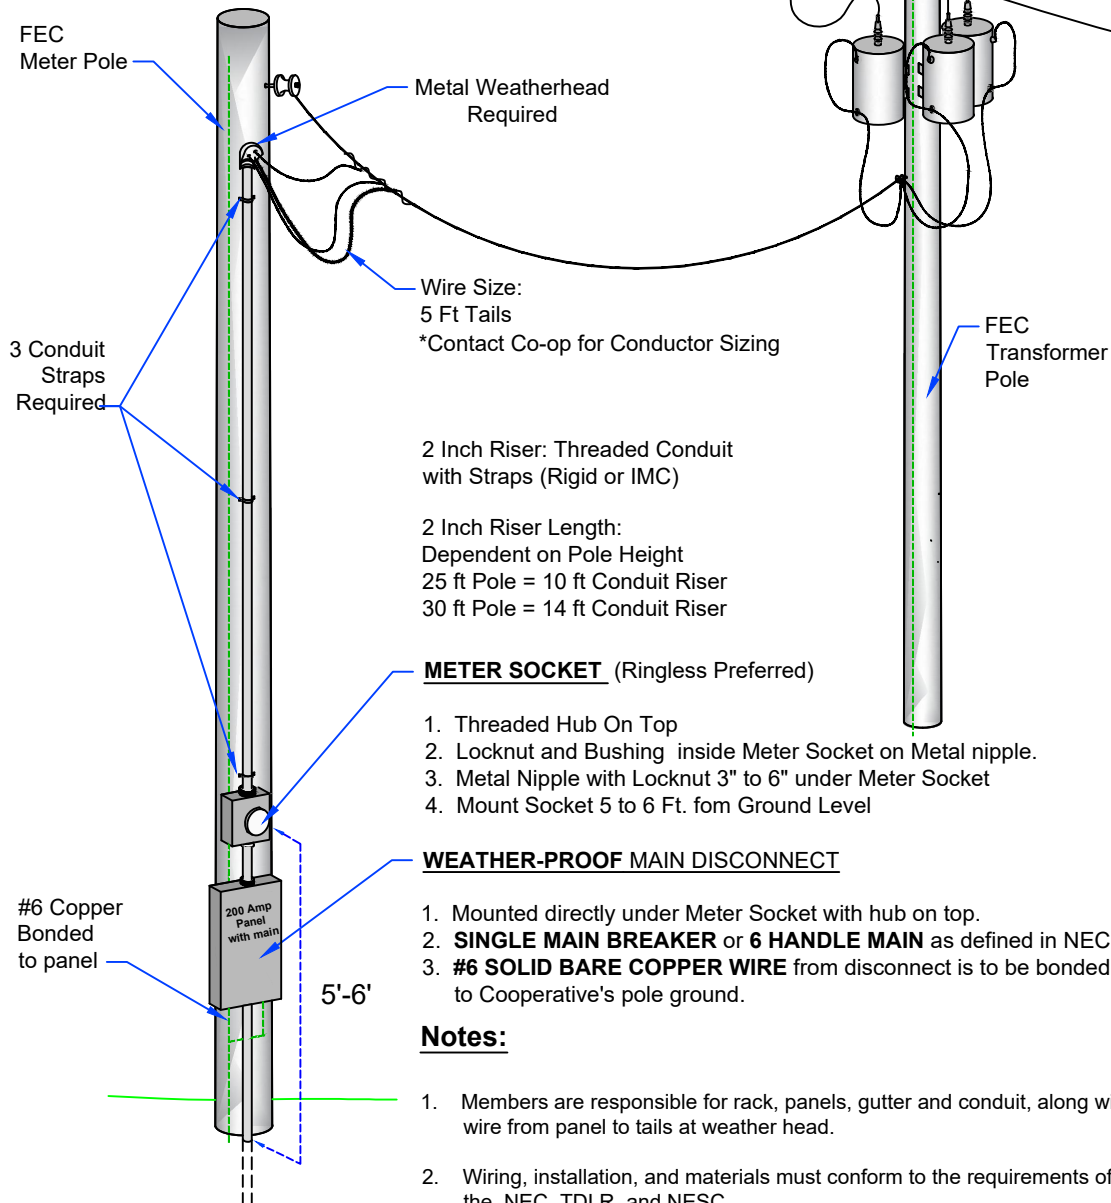

Notes:

1. Members are responsible for rack, panels, gutter and conduit, along with wire from panel to tails at weather head.
2. Wiring, installation, and materials must conform to the requirements of the NEC, TDLR, and NESC.

DATE: 3/20/2025



Three Phase 200 Amp Service - on Meter Pole - 120/208 & 120/240

Phone

(979) 968-3181 1-866-968-3181

MS-50